




常州双杰电子有限公司

SERIES HYBRID STEPPING MOTOR(混合式步进电机):

39BYG(1.8°/0.9°) 2 相

Wiring Diagram(接线图):

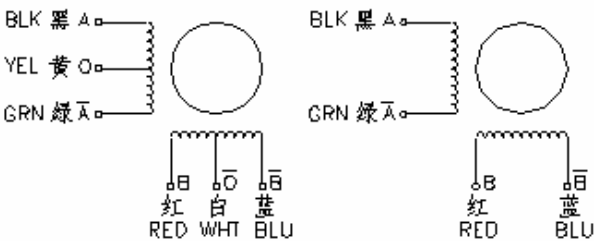

UNI-POLAR(6 LEADS)


BI-POLAR(4LEADS)

Electrical Specifications(技术数据):

型号 Series Model	步距角 Step Angle (°)	机身長 Motor Length (mm)	电流 Rated Current (A)	电阻 Phase Resistance (Ω)	电感 Phase Inductance (mH)	静力矩 Holding Torque (Kg.cm)	定位力矩 Detent Torque (g.cm)	转动惯量 Rotor Inertia (g.cm ²)	引线数 Lead Wire (NO.)	重量 Motor Weight (g)
39BYGB0413	1.8	20	0.5	13	6.4	0.7	50	12	4	100
39BYGB6410	1.8	26	0.6	10	10	1.5	80	14	4	140
39BYGB4405	1.8	34	0.6	12	15	2.2	100	19	4	160
39BYGB4640	1.8	34	0.3	40	20	1.3	100	19	6	160
39BYGB8404	1.8	38	1.2	3.8	6.0	2.7	120	24	4	240
39BYGB8630	1.8	38	0.4	30	22	1.8	120	24	4	240

*以上仅为代表性产品，派生产品可根据客户要求制作！

Dimensions(外形图): unit=mm

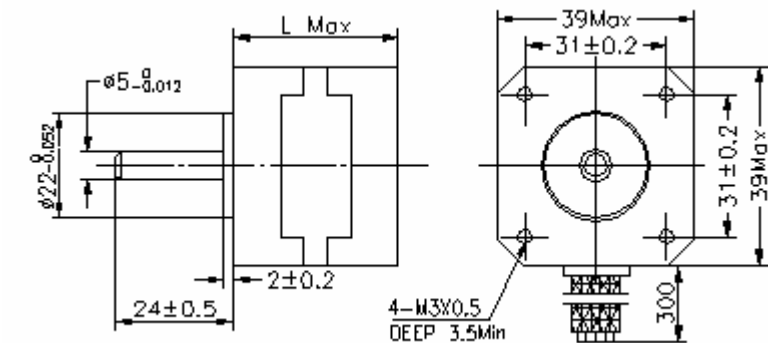

Motor Length(机身说明):

型号	机身長
39BYGB0XXX	20 mm
39BYGB6XXX	26 mm
39BYGB4XXX	34 mm
39BYGB8XXX	38 mm

常州双杰电子有限公司
江苏省常州市戚墅堰芳渚村360 号
电话: 0519-88352577 88359735
传真: 0519-88352858
www.czshuangjie.com

CHANGZHOU MOTORS AND ELECTRIC APPLIANCE CO.,LTD.
Adrees:360 Fangzhu Qishuyan Changzhou China
TEL: 086-519-88359735
FAX: 086-519-88352858