



磁阻式步进电动机 130BC/BF




技术数据: SPECIFICATIONS


型号	相数	步距角	电压	电流	保持转矩	最高空载起动频率	运行频率	接线图	备注
Model	No. of Phase	Step Angle (Deg.)	Voltage (V)	Current (A)	Holding Torque Nm (kg. cm)	No-load pull-In Frequency (Hz)	Pull-out Frequency (Hz)	Wdg	Notes
130BF001	5	0.75/1.5	80/12	10	9.31 (95)	3000	10600	3	
130BC3100	3	0.6/1.2	80-300	8	11.76 (120)	150	15000	5	
130BC3100A	3	0.6/1.2	80-300	10	19.6 (200)	1300	15000	5	
130BC3100B	3	0.9/1.2	80-300	10	17.64 (180)	1300	15000	5	

*以上表中所列仅为代表性产品。


矩频特性: Pulse-torque Characteristics

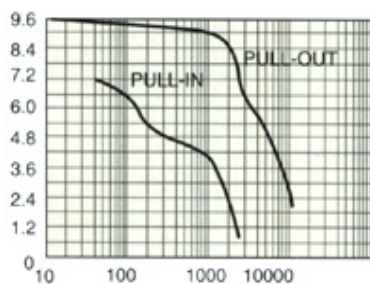


PULSE-RATE (Hz)
130BF001

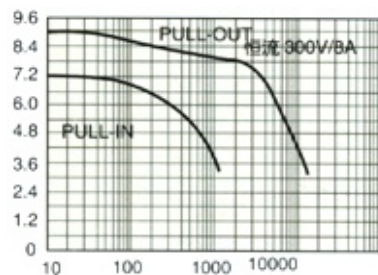

PULSE-RATE (Hz)
130BC3100




PULSE-RATE (Hz)
150BC548

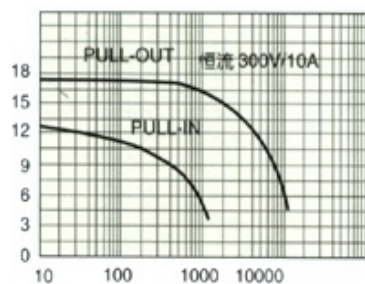

PULSE-RATE (Hz)
130BC3100A/3100B

外型图:Figure

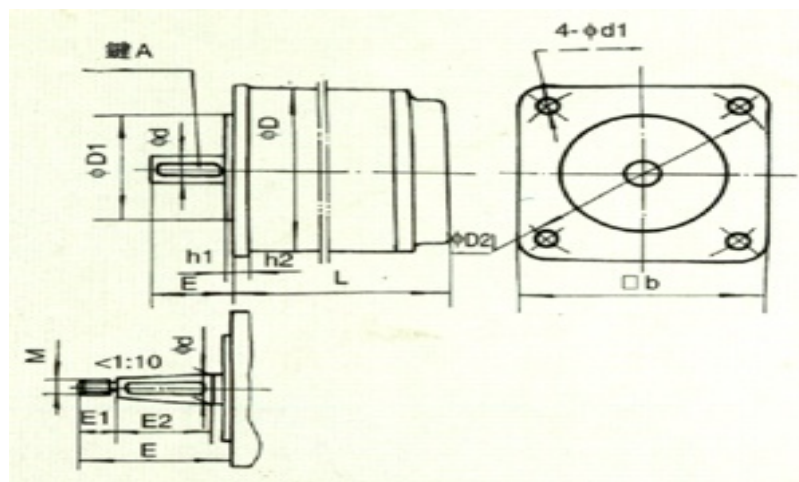

技术数据: SPECIFICATIONS

型号 Model	ϕD (H1 2)	$\phi D1$ (H 7)	$\square b$	E	L	$h1$	$h2$	ϕd	$\phi D2$	$\phi d1$	键 (key) A	E1	E2	M
130BF001	130	100	134	37	165	5	10	14K	155	11	平键 4×30			
130BC3100	130	100	134	58	180	5	10	22k	155	11	平键 6×30	12	36	12×1.25
130BC3100A	130	100	134	58	240	5	10	22k	155	11	平键 6×30	12	36	12×1.25
130BC3100B	130	100	134	58	210	5	10	22k	155	11	平键 6×30	12	36	12×1.25

*以上表中所列仅为代表性产品

常州双杰电子有限公司
江苏省常州市戚墅堰芳渚村360号
电话: 0519-88352577 88359735
传真: 0519-88352858
www.czshuangjie.com